


17-09 PN S₃R Swivel with encoder and display

TPS-D-30232 Swivel with encoder

system 3R

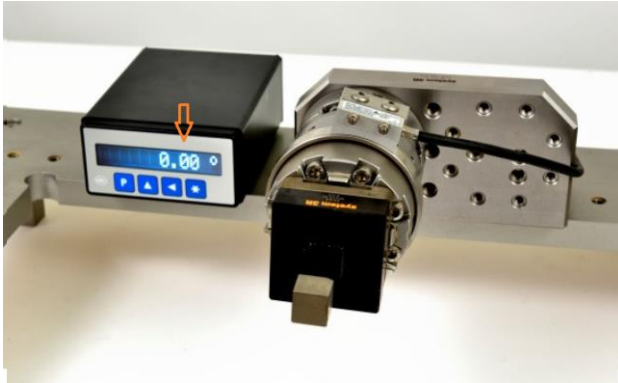

Applications



Swiveling element with a manual Macro chuck and mechanical locking of the set position.

Swiveling element 360° with encoder and display – Manual Macro chuck and mechanical locking of the set position.

After power off, display is flashing due to initial reference search missing.

Always make the reference search clockwise direction before use (see arrow on chuck).

For reference search:

Keep red button on rear wall of display box pressed and turn chuck in indicated direction so that arrow on scale passes encoder head. Release button. Display should not be flashing anymore.

- Swiveling element is manual
- Locking of chuck 6 Nm
- Locking of the swivel 6 Nm
- Maximum hanging load 8 Nm
- Material rust resistant
- Swivel accuracy $\pm 0,03^\circ$
- Drawbar 3R-605.2RS (sold separately)
- Can be used in EDM, wire-EDM and light cutting, milling and grinding.

[more information on our website](#)



Biesveld 2, 5673BN Nuenen, Phone +31 (0) 2982036, E-mail sales@ertec.eu